

AREZZO

TECHNICAL DESCRIPTION

FRAME

Solid larch wood, laminated wood and OSB covered by high resilience polyurethane cold-molded foam 40 P/PH, wrapped in 100% polyester fibre 200 gr/m² and polyester fabric.

40 kg/m³ = 8,0 KPa of bearing capacity* at 40% compression.

SUSPENSION

High resilience polyurethane cold-molded foam 40 P/PH and T30/C.

40 kg/m³ = 8,0 KPa of bearing capacity* at 40% compression.

30 kg/m³ = 2,7 KPa of bearing capacity* at 40% compression.

SEAT CUSHION PADDING

High resilience polyurethane cold-molded foam.

35 kg/m³ = 3,2 KPa of bearing capacity* at 40% compression.

The cushion is then wrapped in a special, anti-perforation 100% cotton quilted lining of new goose and duck feathers, washed and sterilized at 140 ° (50% goose - 50% duck).

All padding is wrapped in polyester fabric.

Removable cover by zipper.

Loose cushion.

BACK AND HEADREST PADDING

High resilience polyurethane cold-molded foam T30/C.

30 kg/m³ = 2,7 KPa of bearing capacity* at 40% compression.

All this is then wrapped in a special, anti-perforation 100% cotton quilted lining of new goose and duck feathers, washed and sterilized at 140 ° (50% goose - 50% duck). All padding is wrapped in polyester fabric.

Removable cover by zipper.

Adjustable headrest mechanism integrated in a mold of high resilience polyurethane foam of very high density.

Cushion placed / recessed in structure.

ARM PADDING

High resilience polyurethane cold-molded foam 40 P/PH, wrapped in 100% polyester fibre 200 gr/m² and polyester fabric.

40 kg/m³ = 8,0 KPa of bearing capacity* at 40% compression.

Armrest integrated in the sofa frame.

FEET

Steel feet, matt black epoxy finish, oven heated. Height 6 cm.

Central plastic feet for all sofa sizes.

BED-SOFA



Not available.

REMOVABLE COVER

When in fabric, cover is entirely removable by Velcro strip; when in leather, cover is not removable.

The presence of feathers or polyester fibres gives an intentionally soft appearance. This is incompatible with the tastes of customers loving rigid cushions.

With the aim of improving quality, Triss reserves the right to make any technical and material change without notice.

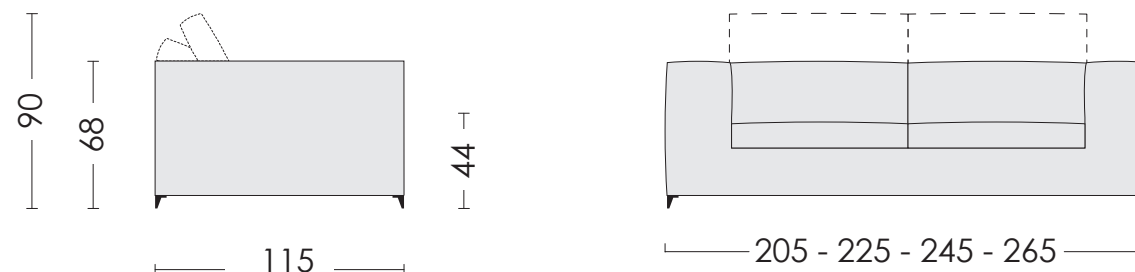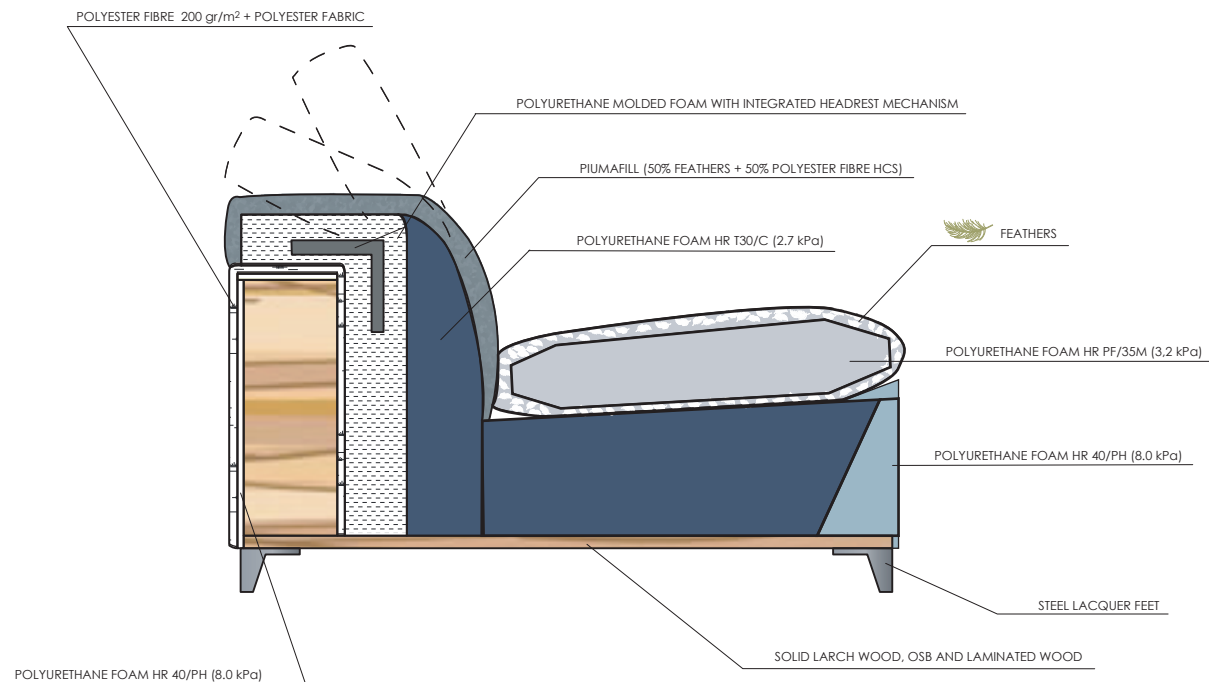

* bearing capacity: capacity of a material to withstand compression